

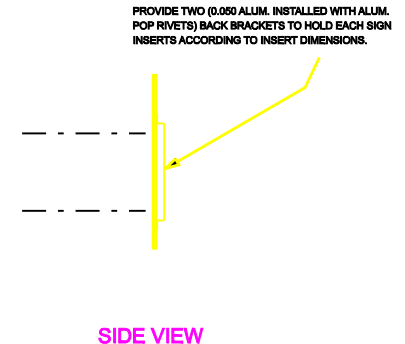
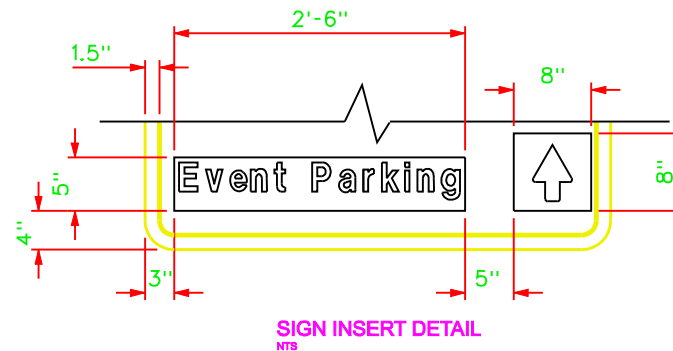
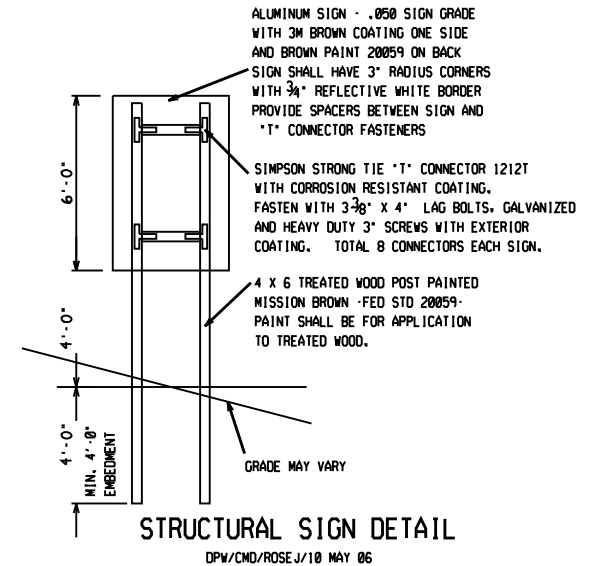


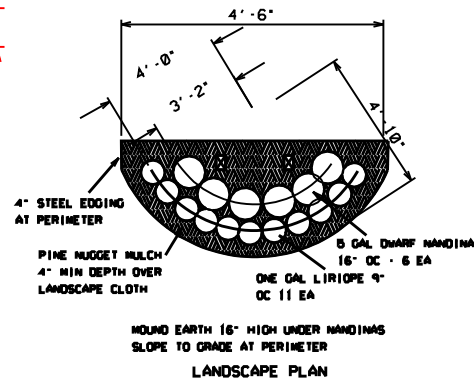


**NOTES:**

1. THE 4" X 6" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 16" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NOMUTGD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-163.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.



DIRECTORATE OF PUBLIC WORKS FORT BRAGG, NORTH CAROLINA	
FORT BRAGG DIRECTIONAL SIGNS	
FORT BRAGG NORTH CAROLINA	
DATE 11 MAY 08	SCALE SIGN DETAILS
DESIGNED BY PW- 6860	CHECKED BY PW- 6860
SHEET 7 OF 7	

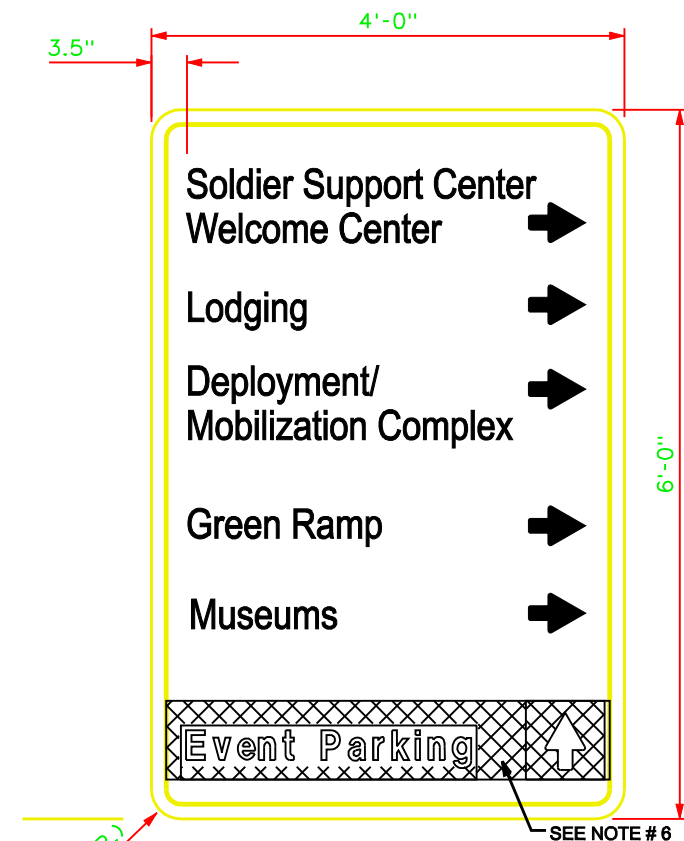


## 6.2 SIGN DETAIL


SCALE 2" = 1'-0"

### NOTES:


1. THE 4" X 8" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 18" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NDMUTCD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL. EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.




ARROW DETAIL

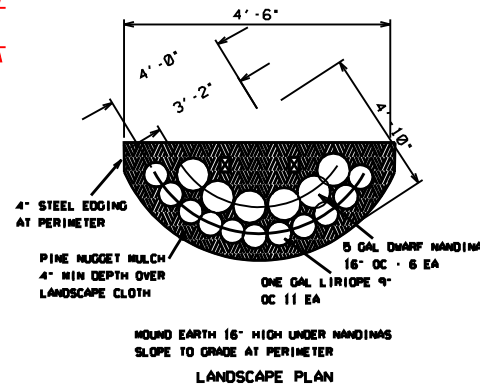

LANDSCAPE PLAN

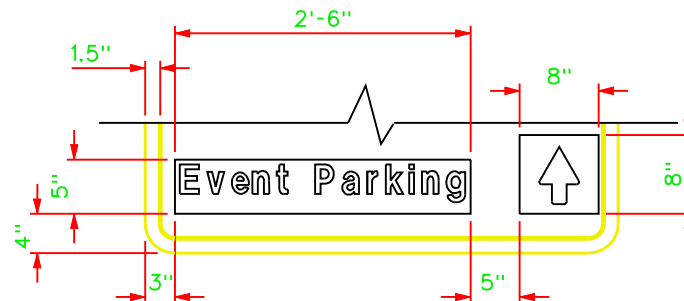

SIGN INSERT DETAIL  
NTS

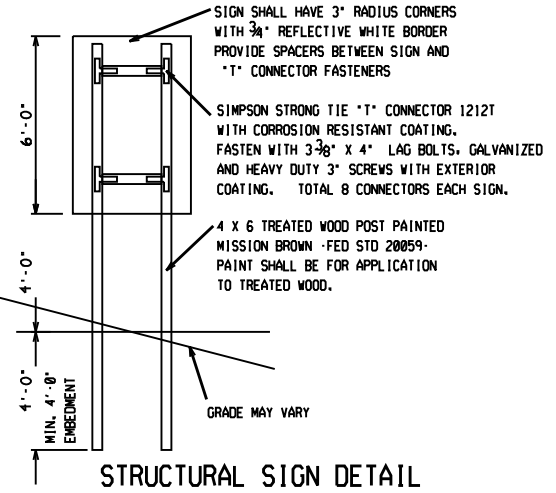

STRUCTURAL SIGN DETAIL

DPW/CMD/ROSE/J/10 MAY 06

PROVIDE TWO (0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.

SIDE VIEW

DIRECTORATE OF PUBLIC WORKS  
FORT BRAGG, NORTH CAROLINA


FORT BRAGG  
DIRECTIONAL SIGNS

FORT BRAGG NORTH CAROLINA

SCALE	DATE
SIGN DETAILS	11 MAY 06
DESIGNED BY	CHECKED BY
DRAWN BY	DATE
PW- 6680	SHEET 7 OF 7

CAD FILE NAME AND BY NUMBER






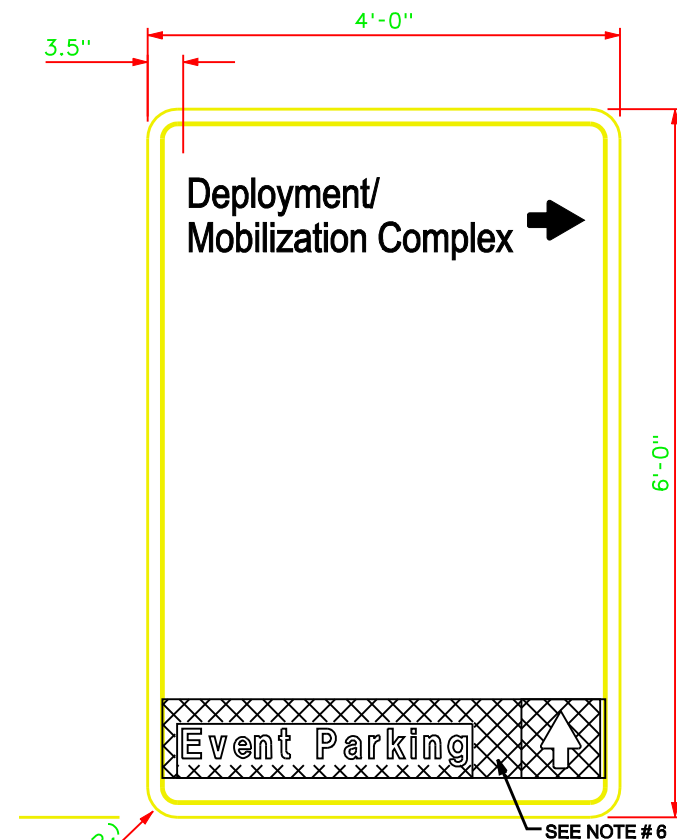


## 6.4 SIGN DETAIL

SCALE 2" = 1'-0"

### NOTES:

1. THE 4" X 8" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE. (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 18" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMAUTCD DRAWING 803.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL. EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.

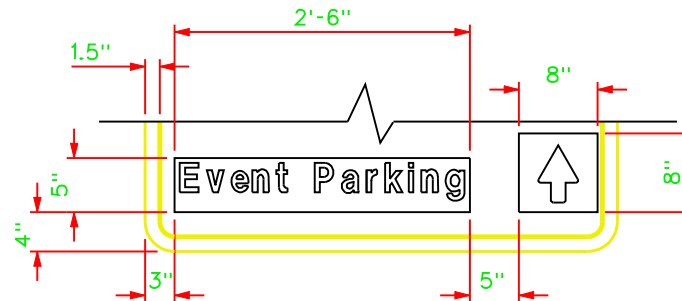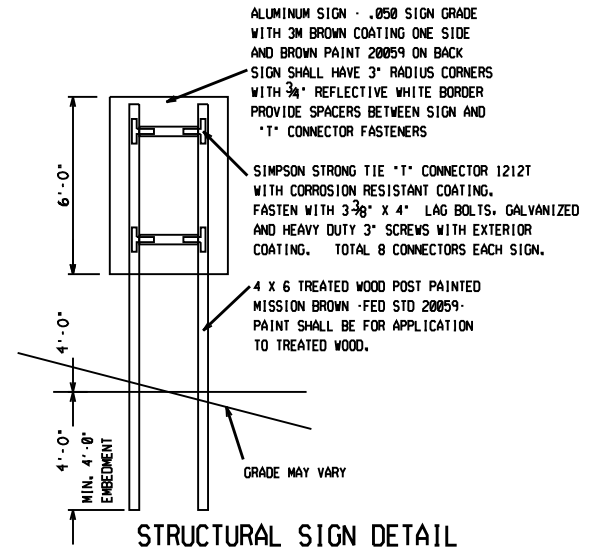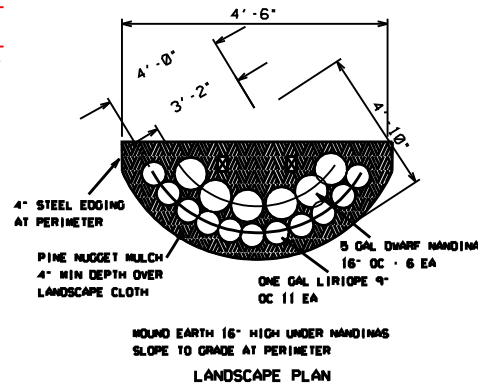

PROVIDE TWO (2) 0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.

### SIDE VIEW

DIRECTORATE OF PUBLIC WORKS  
FORT BRAGG, NORTH CAROLINA

FORT BRAGG  
DIRECTIONAL SIGNS

FORT BRAGG NORTH CAROLINA

SIGN DETAILS 11 MAY 08

DATE: 11 MAY 08

DESIGNED BY: PW-6880


CHECKED BY: PW-6880

DATE: 11 MAY 08

SCALE: 1/4" = 1'-0"

SHEET 7 OF 7

CAD FILE NAME AND OR NUMBER

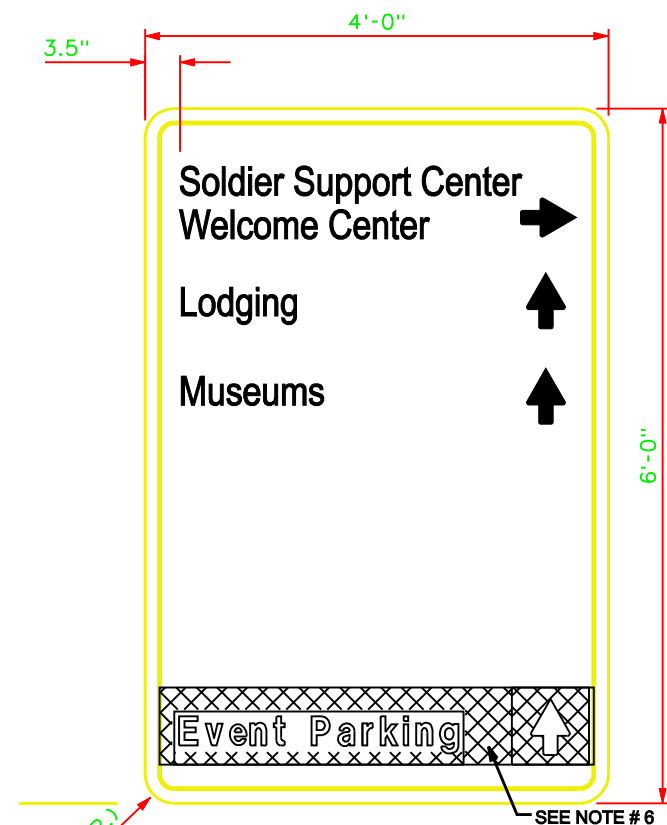


## 6.5 SIGN DETAIL



SCALE 2" = 1' - 0"

### NOTES:

1. THE 4" X 8" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 18" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMUTCD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL. EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.




ARROW DETAIL

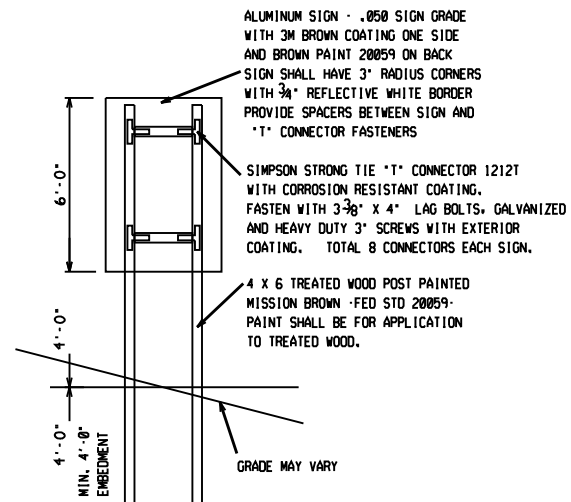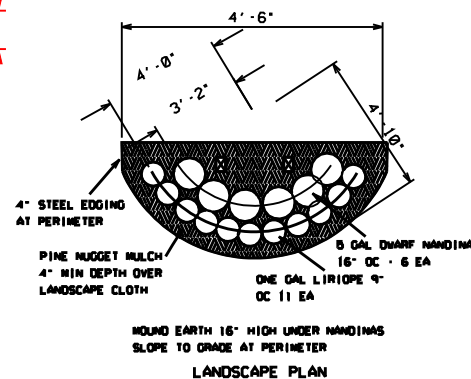

## STRUCTURAL SIGN DETAIL

DPW/CMD/ROSE/J10 MAY 06

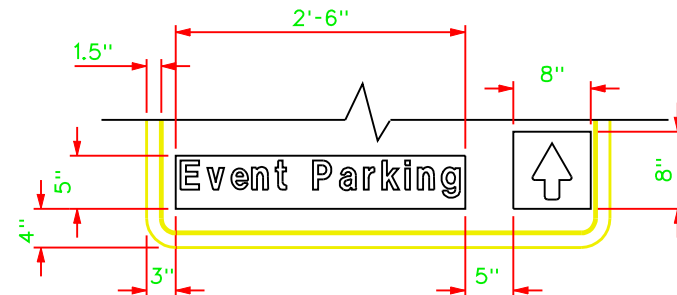

## SIGN INSERT DETAIL

NTS

PROVIDE TWO (0.060 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.

## SIDE VIEW

DIRECTORATE OF PUBLIC WORKS  
FORT BRAGG, NORTH CAROLINA

## FORT BRAGG DIRECTIONAL SIGNS

FORT BRAGG NORTH CAROLINA

DATE: 11 MAY 06

SIGN DETAILS

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06


DESIGNED BY: PW-6680

CHECKED BY: PW-6680

DATE: 11 MAY 06

DESIGNED BY: PW-6680

CHECKED BY: PW-6680




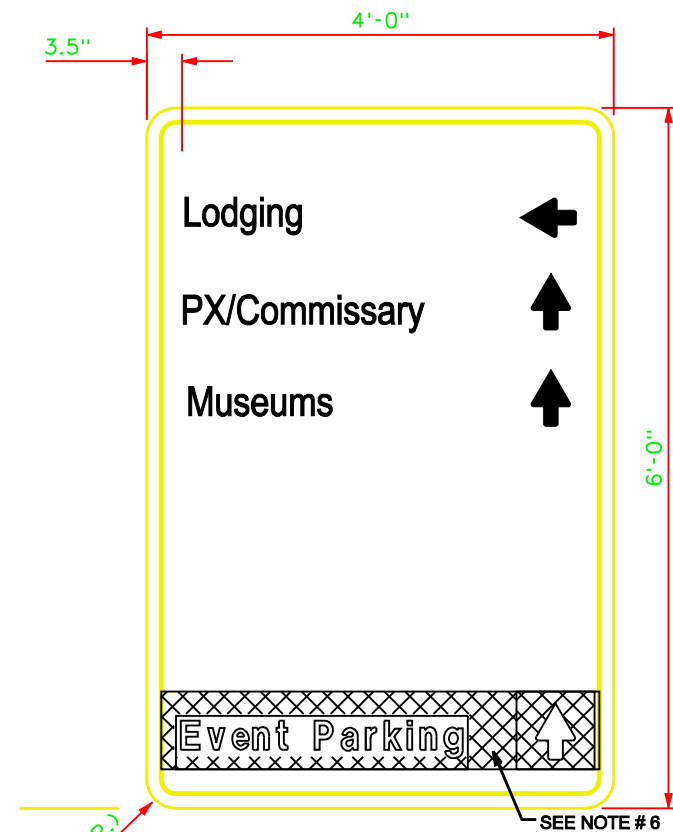


## 6.6 SIGN DETAIL

SCALE 2" = 1' - 0"

### NOTES:

1. THE 4" X 6" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE ( WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 18" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMUTCD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.

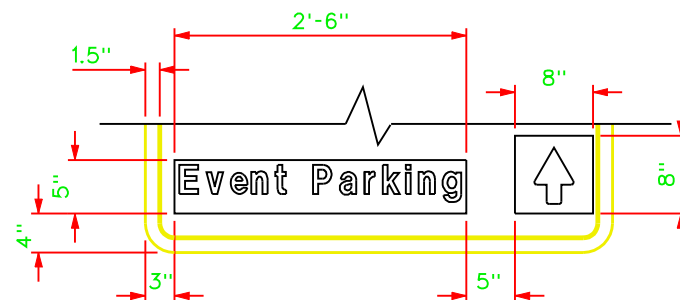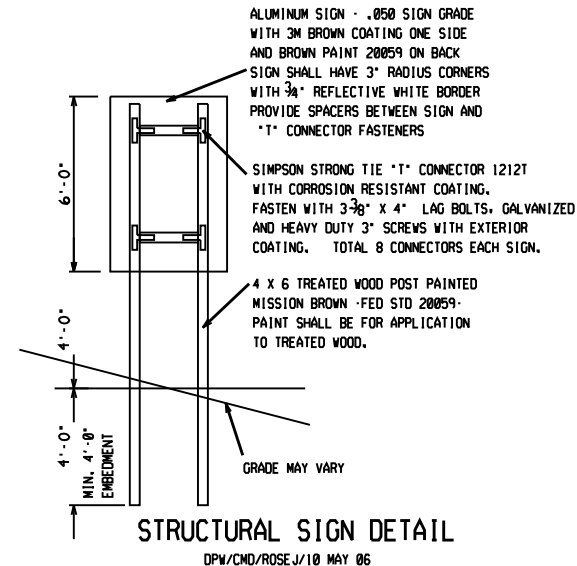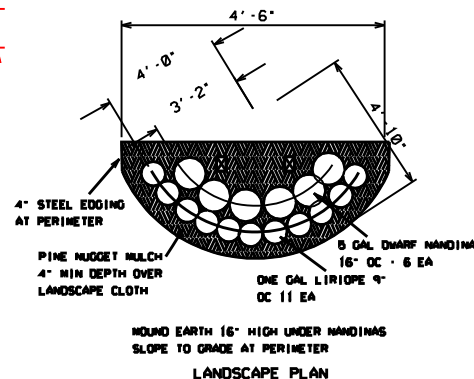

PROVIDE TWO (0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.

### SIDE VIEW

DIRECTORATE OF PUBLIC WORKS FORT BRAGG, NORTH CAROLINA	
FORT BRAGG DIRECTIONAL SIGNS	
FORT BRAGG NORTH CAROLINA	
DATE 11 MAY 08	DESIGNER 11 MAY 08
CHECKED BY PW- 8860	DATE 11 MAY 08
SHEET 7 OF 7	

END FILE NAME AND OF NUMBER